


SIBOX DIGITAL VENUE INSTALLATION DIAGRAM (VERTICAL)

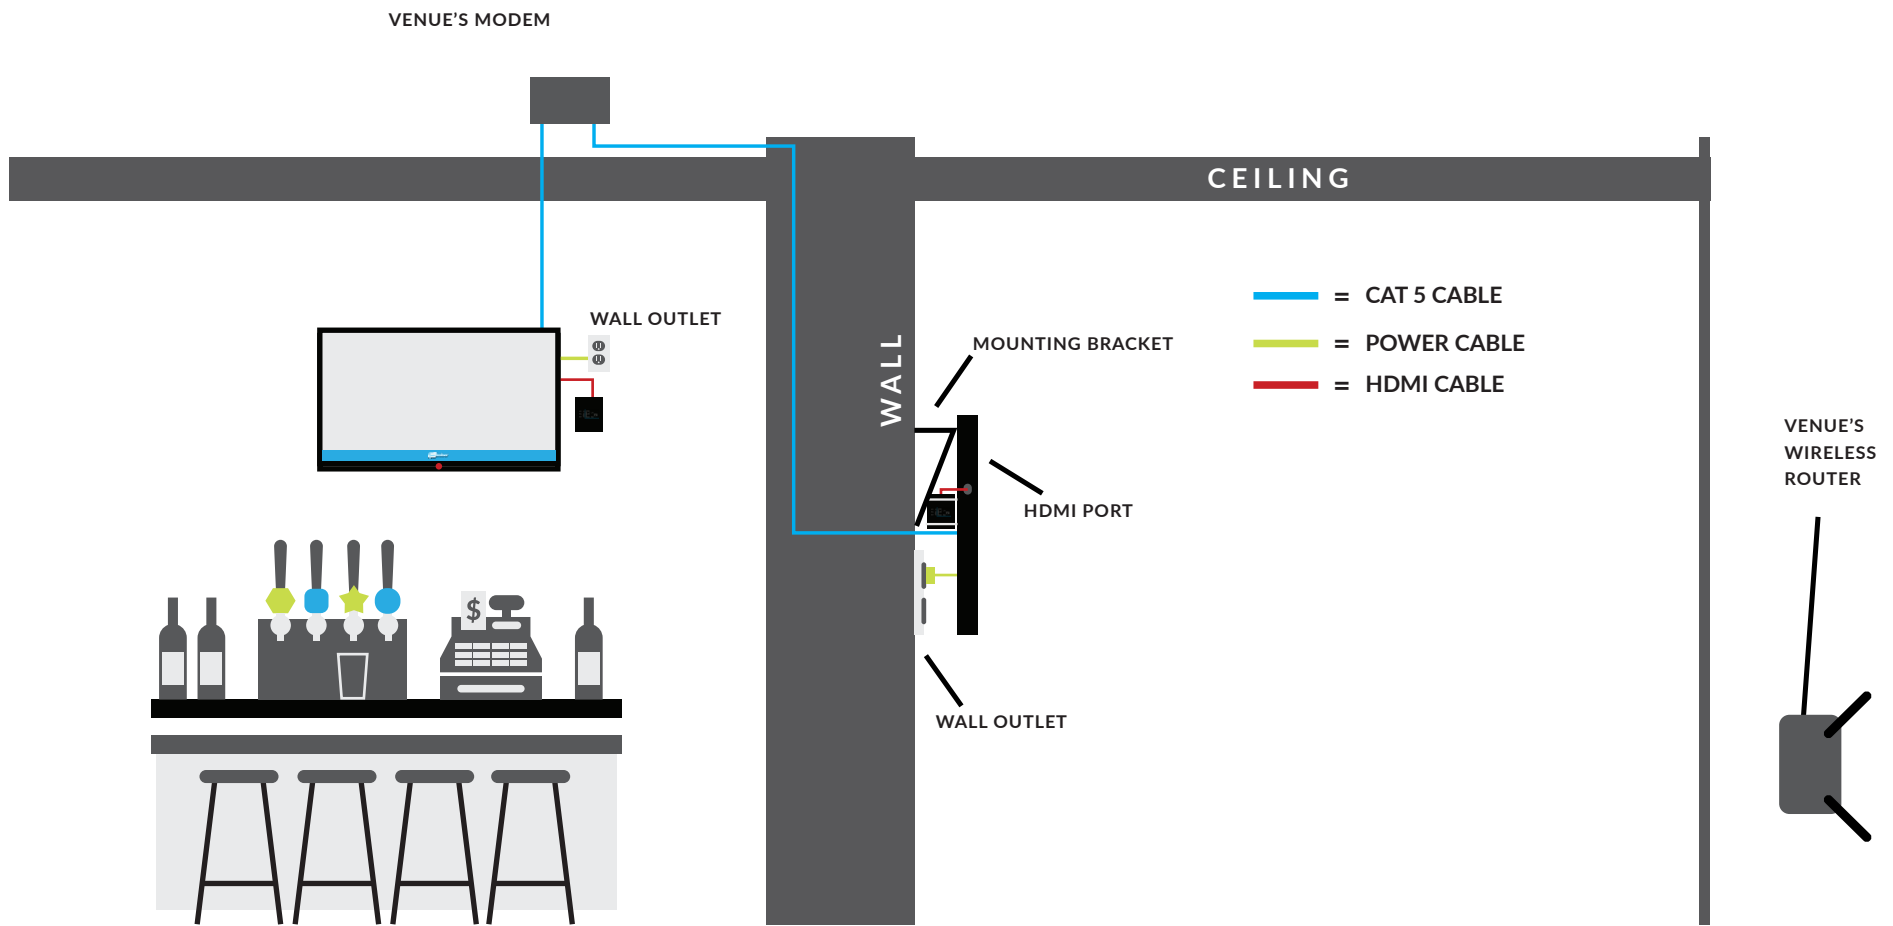

SIBOX DIGITAL VENUE INSTALLATION DIAGRAM (HORIZONTAL)

# SiBox **INSTALLATION STEPS**

**OVERALL GOAL:** Install a standard outlet and a Cat5 (Ethernet cable)

1. Run network cable from modem to spot in ceiling above install location.
2. Run metal-clad cable from power to install spot.
3. Measure wall mount to TV and secure mount. Make sure vertical TVs will be installed with the original “bottom” of the TV now oriented on the right, in the 3 o’clock position when looking at it straight on.
4. Measure where TV will be placed on the wall.
5. Drill holes in the wall for anchors for the mount’s back plate.
6. Secure back plate onto the wall.
7. Create openings for outlets.
8. Pull Cat5 and receptacle through.
9. Connect HDMI, Cat5 and SiBox to TV, securing the SiBox with velcro and/or zip-ties where needed.
10. Mount the TV and connect power. Power on the TV and you’re all set!

*\*\*Once TV is powered on, you may need to disconnect and reconnect the HDMI cord for it to begin working, or reboot the SiBox. This can happen if the TV doesn’t recognize the device.\*\**

